Using Scale Anchoring to Interpret the TIMSS 2015 Achievement Scales

Ina V.S. Mullis
Kerry E. Cotter
Victoria A.S. Centurino
Bethany G. Fishbein
Jenny Liu

Introduction

As described in Chapter 13: Scaling the TIMSS 2015 Achievement Data, the TIMSS 2015 achievement results are summarized using item response theory (IRT) scaling and reported on 0 to 1,000 achievement scales, with most achievement scores ranging from 300 to 700. Countries' average scores provide users of the data with information about how achievement compares among countries and whether scores are improving or declining over time.

To provide as much information as possible for policy and curriculum reform, however, it is important to understand the mathematics and science competencies associated with different locations within the range of scores o /MCID 36 /BDC BT/T11 1 Tf-0.009Tc -0.011 Tw 12 0 0 12 75 250.809 Tm[(a)

Science and Mathematics Item Review Committee (SMIRC), to conduct a scale anchoring analysis to describe student competencies at the benchmarks.

This chapt 42 pt 42 pt 42 (t 42 &1)11denenct 42 acr)4(ks.(r)et)6((t 42 n)8a)-pt(t13)etdenc.8(M(t a2(u(t13)
performance at the international benchmarks for TIMSS 2015. The analysis was conducted separately for mathematics and for science at fourth and eighth grades. In brief, scale anchoring

involved identifying items that students scoring at the international benchmarks answered correctly, and then having experts examine the content of each item to determine the kind of knowledge, skill, or reasoning demonstrated by students who responded correctly to the item. The experts then summarized the detailed list of item competencies in a brief description of achievement at each international benchmark. Thus, the scale anchoring procedure yielded a content-referenced interpretation of the achievement results that can be considered in light of the TIMSS 2015 frameworks for assessing mathematics and science.

Classifying the Items

As the first step, students scoring within 5 scale-score points of each benchmark (i.e., the benchmark point plus or minus 5) were identified for the benchmark analysis. This 10-point range provided an adequate sample of students scoring at the benchmark, and yet was small enough so that performance at one international benchmark was still distinguishable from the next. The score ranges around each international benchmark and the number of students scoring in each range are shown in Exhibit 14.1.

the scales, and that the descriptions reflect demonstrably different accomplishments by students reaching each successively higher benchmark. Because the process entails the delineation of sets of items that students at each international benchmark are likely to answer correctly and that discriminate between one benchmark and the next, the criteria for identifying the items that anchor considers performance at more than one benchmark.

For multiple-choice items, 65 percent was used as the criterion for anchoring at each benchmark being analyzed, since students would be likely (about two thirds of the time) to answer the item correctly. A somewhat less strict criterion was used for the constructed response items, because students had much less scope for guessing. For constructed response items, the criterion of 50 percent was used for the benchmark without any discrimination criterion for the next lower benchmark. In addition, a criterion of less than 50 percent was used for the next lower

item correctly. To be completely inclusive for all items, items that met only the criterion that 60 to 65 percent of the students answered correctly (regardless of the performance of students at the next lower point) were also identified. The categories of items were mutually exclusive, and ensured that all of the items were available to inform the descriptions of student achievement at the anchor levels. A multiple-choice item was considered to be "too difficult" to anchor if less than 60 percent of students at the advanced benchmark answered the item correctly. A constructed response item was considered to be "too difficult" to anchor if less than 50 percent of students at the advanced benchmark answered the item correctly.

Exhibit 14.2 presents the number of TIMSS 2015 mathematics and science items that anchored at each international benchmark. A description of the items for mathematics at the fourth grade, science at the fourth grade, mathematics at the eighth grade, and science the eighth grade can be

Appendix 14A: TIMSS 2015 Fourth Grade Mathematics Item Descriptions Developed During the TIMSS 2015 Benchmarking

M01_01

M01_02	Solves a word problem involving multiplication of one-digit numbers
M02_06	Generates the next term in a well-defined number pattern
M04_02	Determines a four-digit number given the place values of the digits
M08_01	Identifies a four-digit number given in expanded form
M08_07	Identifies an expression that represents a situation
M09_01	Adds a four-digit and a three-digit number
M10_02	Divides a three-digit number by a one-digit number
M12_03	Multiplies a one-digit number by a three-digit number
M12_06	Determines the operation to complete a number sentence
M13_02	Identifies the representation of a non-unit fraction
N01_03	Solves a word problem involving multiplication of a one-digit number by 10
N01_06	Solves a two-step word problem involving subtraction and division
N01_12	Solves a word problem involving addition of money
N02_01	Identifies a four-digit number given the digits in two places
N02_02	Solves a word problem involving addition of two- and three-digit numbers
N02_03	Divides a two-digit number by a one-digit number with a remainder
N03_02	Divides a two-digit number by a one-digit number
N03_07	Solves a word problem involving addition of decimals
N03_11	Solves a word problem involving addition of hours and minutes
N05_03	Solves a word problem involving division of a two-digit number by a one-digit number
N05_04	Identifies an expression that represents a situation
N05_12	Solves a word problem involving addition of hours and minutes
N06_01	Subtracts a two-digit number from a three-digit number

N06_11	Determines the number of faces on a rectangular prism
N07_10	Identifies a common shape inside another common shape
N09_09	Identifies a triangle with given properties
N09_11	Justifies which figure made of unit cubes has the larger volume
N10_08	Writes the names of four common two-dimensional shapes
M01_11	Interprets information in a table to solve a problem
M02_10	Reads data from a table
M07_12	Recognizes which set of labels on a bar graph could show given information
M14_10A	Reads data from a graph

M01_03	Identifies multiples of a given number
M01_04	Adds two two-place decimals
M01_05	Follows a rule to complete a table
M02_01	Divides a two-digit number by a one-digit number with a remainder
M02_02	Provides numbers that round to specified conditions (2 of 2 points)
M02_03	Analyzes place value conditions to identify a four-digit number
M03_01	Subtracts a three-digit number from a four-digit number
M03_02	Solves a word problem involving division of two-digit numbers with a remainder
M04_05	Solves a word problem involving subtracting one-place decimals
M04_06	Identifies an expression that represents a situation
M05_02	Identifies the whole number closest to a given multiple of a hundred
M06_01	Identifies an expression that represents a situation
M06_05	Solves a multi-step problem involving two-place decimals and whole numbers

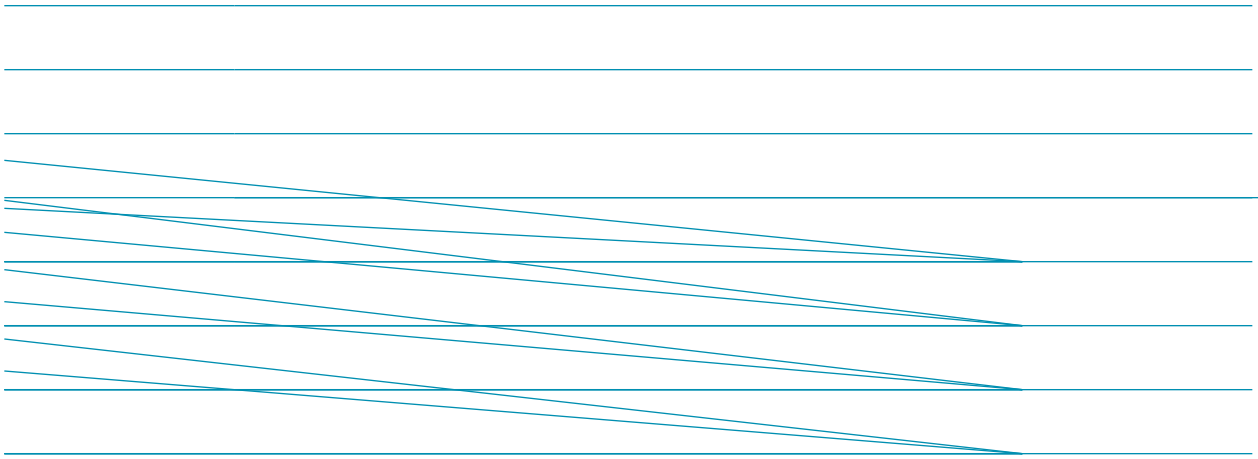

M14_05	Solves for the missing number in a subtraction sentence
M14_07	Follows a two-step rule to generate the next number in a pattern
[illegible]	[illegible]
M01_06B	Draws a specified geometric shape by connecting dots on a circle
M01_06C	Draws a specified geometric shape by connecting dots on a circle
M01_07	Identifies the number of edges of a solid shown in a picture
M01_08	Determines the perimeter of a figure made of squares
M03_07	Identifies a shape that can be made by combining two given shapes
M03_08	Identifies a property common to two triangles
M04_09	Identifies a solid given two faces
M05_08	

M03_11	Compares information in a table and a bar graph to solve a problem
M03_12	Interprets data from a pie chart to solve a problem
M05_13	Completes a bar graph from information given in a tally chart (2 of 2 points)
M06_11B	Uses information from a bar graph to solve a problem
M07_11	Interprets a bar graph to solve a problem
M07_13A	Finds totals and decides which one is the least
M09_12	Completes a bar graph using information from a pictograph
M10_11	Identifies a pie chart that represents given data
M11_11	Uses information from a bar graph to solve a problem
M11_12	Identifies a pie chart that has the same information as a bar graph
M12_11A	Uses a key to retr Tw 9 0 0_1.9(1h t)4.3(o s)-7.2(o)-8.5(l)-5.3(v)6chart th

M05_04A	Identifies the circular representation of a non-unit fraction
M05_04B	Explains why a chosen circular representation shows a given non-unit fraction
M05_05	

M01_10	Draws all four lines of symmetry on a non-standard shape (2 of 2 points)
M02_07	Estimates the total length of a curved path given the length of a part of it
M02_08A	Given a description of a movement on a number line, determines another possible ending position
M02_08B	Given a starting point and two movements on a number line, identifies a possible ending position
M03_10	Finds the perimeter of a given figure made of a square and a rectangle
M04_10A	Draws a parallel line on a square grid given conditions
M04_10B	Draws a perpendicular line on a square grid given conditions
M05_09	Solves a multi-step word problem involving perimeter
M05_11	Identifies the area of a right triangle drawn on a grid
M06_08	Selects an appropriate unit of length to use in three different contexts
M07_08	Determines the number of cubes in a given rectangular box
M07_10	Draws a line through a given point perpendicular to a given line
M08_08	Identifies parallel lines on a geometric shape
M09_07	Identifies a rule to sort shapes into two sets
M09_09	Identifies a shape that has both line and rotational symmetry
M09_10	Determines the length of one side of an equilateral triangle and finds its perimeter
M10_08	Reads a ruler to find the length of a line segment beginning and ending at half-units
M10_10	Determines the number of square and triangular faces of three-dimensional shapes (2 of 2 points)
M11_07	Reads a ruler to find the length of an object beginning at a half-unit
M11_10	Finds the area of a rectangle given its dimensions
M12_09	Given two positions on a curved path, follows specified moves and labels another position (2 of 2 points)
M12_10	Identifies a net of a hexagonal prism
M13_06A	Identifies a street parallel to a given street

M07_13B	Draws and justifies a conclusion from data given in a table
M08_11	Represents data from a table in a pie chart
M12_11B	

Appendix 14B: TIMSS 2015 Fourth Grade Science Item Descriptions Developed During the TIMSS 2015 Benchmarking

[illegible]	
S02_01	Identifies examples of animals that lay eggs
S03_01	Recognizes the mammal from among four pictures of animals
S05_05	States one thing necessary to maintain good physical health (1 of 2 points)
S07_01	Completes a table by matching diagrams of animals to their ecosystems
S08_03	Recognizes a living thing that produces its own food (1 of 2 points)
S10_01	Recognizes an animal that has a backbone
S14_02	States one way to avoid catching illness in a crowded space (1 of 2 points)
S14_03	Analyzes a diagram to explain which flower will grow better
[illegible]	
S04_08	Classifies materials as solids, liquids, or gases
S07_06	Recognizes ice as the solid form of water
S08_06	Identifies a way to sort objects containing metals
S10_06	Recognizes the states of matter of three different materials

[illegible]	
S01_01	Recognizes the function of seeds
S01_02	Recognizes that the body needs more oxygen during exercise

S12_04A	Interprets data from an investigation to recognize the best condition for growing plants
S12_05	Relates factory pollution to its effect on farm fields
S13_01	Recognizes that in mammals, a male and female of the same kind are needed to reproduce
S13_02	Explains that germs can be transmitted even when people do not appear to be sick
S13_05	Identifies a function of a plant's stalk by interpreting an observation from an investigation

S01_12	Names a source of energy other than coal, oil, or natural gas that is used to produce electricity
S02_07	Explains the function of a battery in an electric circuit
S02_10A	Recognizes which direction to apply a force to reverse the direction of a moving object
S03_08	Given a list of five everyday objects, recognizes which ones conduct electricity
S05_09B	Evaluates between two methods which would dissolve a piece of candy faster
S06_08	Recognizes from a list which are sources of energy and which are not
S06_10	Explains how a sweater can keep a bottle of water cold
S07_04	Identifies the cause of a shadow forming
S07_11	From a diagram, identifies the orientation of the poles on two repelling magnets
S08_08	Recognizes what happens to the water when a puddle of water on a metal tray becomes smaller
S08_10	Explains why pressing a guitar string stops the sound
S09_07	Describes a difference between ice and water in addition to their physical states
S09_09A	Identifies from a diagram how a shadow is formed
S11_06	States a reason for the color change and surface roughening of a metal object over time
S11_08	Gives a reason why two objects of the same shape and size travel different distances after a push
S11_09	Using a model of a flashlight, identifies an object that can be used to complete an electrical connection
S12_09A	Explains why boiling decreases the amount of water in a container
S12_09B	Predicts the effect on a cold window glass of boiling water nearby
S13_07	Observes that two metal bars repel and determines whether they are magnets

S13_08	Explains that heat in a metal object reaches the nearest point soonest
S13_09	Using a diagram, identifies which hidden object could complete an electric circuit
[illegible]	
S01_08	Recognizes evidence that there were many kinds of animals on Earth that no longer exist today
S03_11	

S02_05	Explains how a flu-like disease can be transmitted through the air
S03_05	Analyzes statements to identify possible characteristics of predators and prey
S04_03	Identifies a reason that some mammals pant on hot days
S04_05	

S07_12	Recognizes how long it takes for Earth to orbit the Sun
S07_13	States two things that make up Earth's crust (2 of 2 points)
S09_11	Identifies how fish fossils are formed
S10_10B	Synthesizes precipitation information from a graph and diagram to recognize the best area to plant a crop in a given climate
S11_10	Identifies that clouds are made of water droplets
S11_12	Interprets a diagram of the Earth and the Sun to describe how Earth turning on its axis causes day and night in a particular location
S12_01	Recognizes which place is likely to have weather that is hot and wet
S13_10	Identifies the diagram that shows relative amounts of water and land on the Earth's surface
S14_10	Relates two different environments and weathering effects on rocks

M02_03A	Determines the percentage for a section of a pie chart
M03_04	Orders decimals with different numbers of decimal places
M03_05	Solves a proportion problem involving decimals
M05_02	Recognizes the fraction equivalent to a percentage
M05_03	Approximates the sum of five three-digit numbers to the nearest hundred
M05_04	Identifies the larger of two fractions with different numerators and different denominators and explains why it is larger
M06_01	Uses the distributive law to identify an expression equivalent to a given one
M06_04	Determines fractions equivalent to a given fraction
M07_04B	Finds the unknown term in a proportion in a given situation
M08_01	Identifies an expression equivalent to a given division expression
M08_03	Finds the missing value in an addition problem with both fractions and decimals
M09_04	Given the two parts of a whole in a word problem, identifies the fraction which represents one part
M09_05A	Solves a word problem involving multiplication and addition of whole numbers
M10_02	Identifies equivalent ratios
M10_04	Uses four different digits to write two two-digit numbers with the smallest product
M11_01	Solves a word problem involving ratios
M11_02	Identifies a prime number
M12_01	Solves a word problem involving a fraction of a whole
M12_02	Solves a word problem involving division of whole numbers with a remainder
M13_01	Identifies the representation of a fraction equivalent to a given representation of a fraction
M13_03	Understands a property of adding multipitipit02

[illegible]	
M01_11	Identifies the number of remaining unit cubes
M02_07	Draws the reflection of a shape over a diagonal line on a grid
M03_11	Identifies a net of a rectangular solid
M03_12	Solves a problem involving angles of a triangle and parallel lines
M05_13	Uses the angle properties of triangles and rectangles to find a missing angle
M06_09	Uses the Pythagorean theorem to solve a word problem
M06_10	Solves a problem involving angles of a triangle
M07_09	Draws a symmetrical shape given half of it and its line of symmetry
M08_10	Finds the coordinates of a midpoint given two points in the Cartesian plane
M09_10	Identifies the value of an angle involving properties of corresponding and supplementary angles
M09_11	Draws an angle of a given measure on a square grid
M11_10	Solves a problem involving similar triangles
M13_11	Solves a problem involving angles of a triangle
M14_08A	Solves a word problem involving the length around a hexagonal prism
[illegible]	
M01_14	Explains why a conclusion drawn from a given bar graph is incorrect
M02_13	Identifies the probability of an event
M05_16	Interpolates from a line graph to provide an estimated value
M06_12B	Compares the chances of two outcomes
M07_02	

M13_02B

M02_12	Estimates probability given an observed sample
M03_13	Explains why a data representation could be misleading
M03_14	Interprets data in a pie chart to solve a word problem
M03_15	Uses understanding of mean and range to solve a problem

M11_11	Solves a multi-step word problem involving ratios between volumes
M13_09	Identifies the image of a shape after rotation and reflection
M14_09	Determines the number of exposed faces for unit-cubes that make up a larger cube (2 of 2 points)
M14_10	Solves a word problem involving the Pythagorean theorem
[illegible]	
M04_13	Solves a multi-step problem involving probability
M08_13	

Appendix 14D: TIMSS 2015 Eighth Grade Science Item Descriptions Developed During the TIMSS 2015 Benchmarking

[illegible]	
S13_01	States one reason why male penguins' incubation behavior helps their eggs survive (1 of 2 points)
S14_01A	Uses a food web to identify which organisms are producers
S14_01B	Uses a food web to identify which organisms eat only plants
[illegible]	
S07_06	Recognizes a material that best conducts both heat and electricity
[illegible]	
S12_15	Recognizes whether an electromagnet would attract objects made of various materials (1 of 2 points)
[illegible]	
S03_12A	Using a diagram, identifies what moves water from an artesian basin to the surface

[illegible]	
S02_03	Explains the advantage for a species of mice to have color matching its environment
S03_02	Matches 2 of 4 animal groups to their characteristic features (1 of 2 points)
S04_03	Recognizes characteristics inherited by rabbits in a given context
S04_04	Justifies an advantage of hollow bones for birds
S05_01	Identifies how vaccination helps prevent illnesses
S05_05A	Interprets information in a table to describe how the populations of two organisms changed over time
S06_01	Recognizes a living thing that has growth rings
S06_04	Recognizes from a list of foods which is the best source of calcium
S06_05A	Identifies why fish eat mosquito larvae but not adult mosquitos
S07_01	Recognizes an organism that is a producer

S10_04A	Identifies one way that plant and animal cells are similar (1 of 2 points)
S11_02	Interprets a diagram to identify what happens to biceps and triceps when an elbow bends
S11_03	Recognizes a human characteristic that is acquired
S11_04	Explains how flooding leads to a shortage of drinking water or the spread of disease (1 of 2 points)
S12_01	Recognizes a list of food that comprises a healthy, balanced meal
S12_02	Explains why it is unlikely for someone to get sick with the measles a second time
S12_03	Identifies the conclusion best supported by a diagram of rock layers with embedded fossils
S12_04	Describes two characteristics of mammals that are advantageous for survival in cold weather (2 of 2 points)
S13_02	Recognizes an organism that is made up of cells with cell walls
S13_03	Recognizes how decomposers get their energy
S13_04	Given a food chain, explains which organism competes most with humans in a farming community
S14_02	Explains how a fossil can be classified as plant or animal, based on its cellular structure
S14_03	Predicts how heart rate changes in response to exercise, based on a set of given conditions
...	
S03_05	Recognizes a property of most nonmetals
S05_08B	

S10_10	Recognizes which model best illustrates the results of a chemical reaction
S11_05	From a list of symbols and formulas, recognizes which are elements and which are compounds
S11_10	Explains the effect of temperature on diffusion in the context of an investigation
S12_06	Identifies the number of atoms of each element in nitric acid
S12_07	Use data in a table to order set-ups according to the rate at which a solute will dissolve in water
S14_11	Explains whether a reaction between two solutions in a given context can occur a second time
S01_07	Recognizes the pathway of light required for an object to be seen
S01_08	Recognizes an everyday object most likely to be used as a lever
S02_09	Explains whether a conclusion can be made about the relative strengths of two magnets in a given context
S04_05	Relates knowledge of heat transfer to recognize a graph that shows how two substances eventually reach temperature equilibrium
S05_12	Explains that there are forces acting on students sitting on a wall
S06_10	Recognizes the orientation of a hidden mirror given rays of light reflecting
S07_07	Uses a table showing the speed of sound through different media and knowledge of the state of each medium to recognize a conclusion that may be drawn about the relative speed of sound
S07_09	Recognizes why a helium balloon rises into the air
S07_12	Explains why lightning is seen before thunder is heard during an electrical storm
S09_10	Given the densities of two objects and three liquids, and diagrams showing the objects floating or sinking in the liquids, identifies each liquid
S10_07	Recognizes which graph represents a musical note with given specifications for volume and pitch
S10_08	Recognizes a free-body diagram that has a total force acting towards the right
S11_09	Recognizes how to increase the strength of an electromagnet
S12_14	Recognizes the type of energy transformation that occurs when a car begins to move from rest
S13_09B	Explains that in a parallel arrangement of two bulbs, one bulb failing does not affect the other bulb
S13_10	Recognizes the best explanation of why two bar magnets repel each other
S01_14	Recognizes a consequence of the gravitational pull of the Moon on Earth

S05_03	Recognizes a function of the cell membrane
S05_04	Recognizes an explanation for a change over time in a physical characteristic of an organism
S06_03	Identifies the best conclusion supported by a diagram of limbs from different animals
S06_05B	Predicts the consequence for a prey population of increasing a predator population in a pond ecosystem
S07_02	Recognizes an example of asexual reproduction and describes the characteristics of asexual reproduction
S07_03	Identifies an organism in which gases are exchanged through the skin
S07_05B	Identifies and explains the stage of the life cycle during which a butterfly develops
S08_04	Applies knowledge about the theory of evolution to identify the best conclusion supported by a diagram of limbs from different animals
S08_05	Selects and classifies 4 of 4 foods from a list that comprise a balanced diet (2 of 2 points)
S08_06B	Selects and evaluates data from a table to draw a conclusion about the likely reason for a change in population of a species
S09_03A	Justifies a statement about crocodiles' adaptation to their environment, based on given facts
S09_04	States one similarity between the life cycles of a bird and a frog
S09_05	Identifies an explanation for disappearance of a trait over generations
S10_04A	Identifies two ways that plant and animal cells are similar (2 of 2 points)
S10_04B	States one way that plant and animal cells are different (1 of 2 points)
S12_05	Recognizes an example of a symbiotic relationship between two organisms
S13_01	States two reasons why male penguins' incubation behavior helps their eggs survive (2 of 2 points)
S14_04	Recognizes the functions of 4 of 4 tissues found in the human stomach (2 of 2 points)
...	
S01_06	Recognizes a mixture
S02_05	Recognizes whether characteristics of substances are physical or chemical properties
S02_06	Recognizes a statement that baC /Spa(i)f-0.021 7.8(o o)- th(h)0.9(a)4..4(i).018 TwETEMC /Spa-7.2(h)11.3(y m)-3.6(a)-2.5(l)-6.6tem

S04_10	Identifies and explains whether a described change is physical or chemical
S04_11	Explains whether a reaction took place after a pH indicator is added to a solution based on information provided about the indicator
S05_08A	In the context of an investigation about the gold content of jewelry, describes the measurements to be taken using a graduated cylinder and water to find the volume of the jewelry
S07_10	Applies knowledge of conservation of mass during a neutralization reaction to explain what happens to mass when new substances are formed
S07_11	Applies knowledge of density to explain why oil floats on water
S08_03	Applies knowledge of density to identify and explain which liquid will leave a dropper first after a mixture separates
S09_07	Recognizes a property that is common to both acids and bases
S10_09	Explains the difference between a solid and air in terms of particle spacing in context
S10_11	Recognizes what happens to the atoms in an object pounded flat
S11_06	Identifies an element as a metal or a nonmetal, based on a list of physical properties and predicts one additional property
S13_06	Given their chemical formulas, recognizes a compound with the same number of atoms as another compound
S13_08	Recognizes an everyday process that is an example of a physical change

S01_09	Applies knowledge of expansion of water during freezing to explain why a bottle full of water cracked when it was left in a freezer
S01_12	Applies knowledge of thermal conductivity to explain why ice will stay frozen in a wooden container longer than in a metal container
S02_10	Explains whether one person can see another person in a practical problem involving reflection of light from plane mirrors
S03_08	Given two unknown samples and using knowledge that only gases fill the available space, recognizes a statement about the spacing of particles in the samples
S03_09	Recognizes the relative temperatures of the outside surfaces of containers made of materials with different thermal properties
S04_06	Explains why a vehicle with tires is more likely to sink in the mud than a vehicle with treads
S04_07	Recognizes an explanation for why a ball appears a certain color in a given context
S05_07	Interprets a diagram to describe the direction of heat fehies a2gT/Triarmal ir6 79.5 196.8253 Tm[S)-25.7(0)-7.tdTc 0.0.15 196.82

S08_10	Identifies and explains which of three methods will require the smallest force to move a heavy box onto a truck
S09_09	Recognizes why gases are easier to compress than solids and liquids
S10_06	Uses a diagram to explain one way to increase the strength of an electromagnet
S11_08	Recognizes the property of a gas in a dented ping pong ball that stays constant if the ball is heated
S11_11	Applies knowledge about the relationship between depth and water pressure to recognize a conclusion about the pressure at different depths
S12_13	Draws a conclusion about the states of substances in two pistons, based on the different amounts of compression that occurred
S13_09A	States one reason why a bulb in a diagram of an electrical circuit does not light
S13_09C	Recognizes a correct statement about battery life and bulb brightness in two given electrical circuits
S14_07	Recognizes whether a red object will absorb or reflect different colors of light
S14_08	Indicates whether parts of a light bulb are electrical conductors or insulators
S02_01	Recognizes whether each of five effects is a benefit of recycling paper (2 of 2 points)
S02_14	From diagrams involving the Earth, Moon, and Sun, identifies the one that explains the changing seasons
S03_12B	Identifies the cause of decreasing water flow in an artesian well over time
S03_12C	Explains why water from an artesian well can be hot
S05_14	Recognizes what causes the moon to appear to change shape
S06_14	Uses a diagram to state two advantages of a plant having roots that reach into the subsoil (2 of 2 points)
S06_15	Explains whether an object's weight is less on the Moon than on the Earth
S07_15	Recognizes how a shadow changes throughout the day
S07_16	Dra16f a pl5a16dɒ0.053 e Edr2 of 2 pon, in o1r_12C

S13_11B	Synthesizes information from tables about revolution times around and distances from the Sun to infer relative distances of planets from the Sun
S14_12	Recognizes a negative effect that fertilizer can have on the environment

S01_04B	Indicates in a table which gas is released into the air and which gas is removed from the air during plant respiration
S02_04B	Identifies two factors other than light intensity that could affect the rate of photosynthesis in an investigation (2 of 2 points)
S03_02	Matches 4 of 4 animal groups to their characteristic features (2 of 2 points)
S03_03A	In the context of an investigation about cellular respiration, interprets the role of parts of an experimental set-up to provide a controlled condition
S04_02	Recognizes 3 of 3 major organs in a diagram (2 of 2 points)
S07_05A	Identifies and explains the stage of the life cycle in which a butterfly grows
S08_06C	

S01_11	Calculates resistance from current and voltage
S02_08	Interprets a diagram showing heat transfer to recognize the relative temperatures of two blocks in water
S03_10	From a diagram of an object floating in different liquids, explains that the portion of the object which is submerged depends on the density of the liquid
S04_09	Explains how a substance can be in two different states in a container at one time in a given context
S05_10	Recognizes what happens to the mass and volume of water when it freezes
S06_11	Recognizes the correct statement about the relative motion of an object seen from two frames of reference
S08_08	Recognizes how the temperature of water changes over time when heated
S10_05	Recognizes how the mass of a metal ball will change as it cools down
S02_13	Describes two things being done by car-makers to reduce air pollution (2 of 2 points)
S04_12	Recognizes the gas that makes up most of Earth's atmosphere
S04_14B	Given a diagram, explains a process that shaped a rock formation in the ocean
S10_13B	Synthesizes information in temperature graphs and maps to recognize an explanation for the difference in seasonal climates of two cities at similar latitudes
S12_10	Recognizes the relative composition of gases in Earth's atmosphere
S12_11B	Evaluates a conclusion about climate data, based on one week of weather observations